

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number  
**WO 2004/081974 A2**

(51) International Patent Classification<sup>7</sup>: **H01L**

(21) International Application Number:  
PCT/IB2004/001344

(22) International Filing Date: 12 March 2004 (12.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0303163 14 March 2003 (14.03.2003) FR

(71) Applicant (for all designated States except US):  
**S.O.I.TEC SILICON ON INSULATOR TECH-  
NOLOGIES** [FR/FR]; Parc Technologique des Fontaines,  
Chemin des Franques, F-38190 Bernin (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LETERTRE, Fab-  
rice** [FR/FR]; 33, quai Jongkind, F-38000 Grenoble (FR).  
**RAYSSAC, Olivier** [FR/FR]; 7, chemin Chapitre, F-38100  
Grenoble (FR).

(74) Agents: **MARTIN, Jean-Jacques et al.**; Cabinet Regim-  
beau, 20, rue de Chazelles, F-75847 Paris Cedex 17 (FR).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished  
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: A METHOD OF PRODUCING SUBSTRATES OR COMPONENTS ON SUBSTRATES INVOLVING TRANSFER  
OF A USEFUL LAYER, FOR MICROELECTRONICS, OPTOELECTRONICS, OR OPTICS

(57) Abstract: The invention provides a method of transferring a useful layer of a monocrystalline material from a first support to a second support, comprising the following steps: forming a first substrate comprising the first support (10) and the useful layer (14, 16) with a detachable interface (12) between them, in which a treatment involving the useful layer includes the formation of a peripheral zone of material (161) that may laterally cover said interface; removing material, allowing detachment to reach said interface (12) in order to detach it at said interface; affixing a free face of the useful layer (14, 16) to a second support (20); and detaching at said interface (12). The detachment means can be employed in the absence of a peripheral zone of material. Application to fabricating substrates or components on substrates for microelectronics, optoelectronics, or optics.

WO 2004/081974 A2

A METHOD OF PRODUCING SUBSTRATES OR COMPONENTS ON  
SUBSTRATES INVOLVING TRANSFER OF A USEFUL LAYER, FOR  
MICROELECTRONICS, OPTOELECTRONICS, OR OPTICS

5       The present invention generally relates to methods  
of fabricating substrates for microelectronics,  
optoelectronics, or optics involving transfer of a useful  
layer from a first support to a second support.

10       Various techniques have recently been developed to  
allow the mechanical transfer of a layer of semiconductor  
material - which may or may not already have received  
component production treatments - from a first support to  
a second support.

15       Techniques using buried porous layers that can be  
attacked chemically, such as those described in European  
patent EP-A-0 849 788, can be mentioned in particular.

20       Substrates weakened by implanting gas species,  
whereby a thin useful layer can be separated from the  
remainder of the material by fracture at the implanted  
zone, can also be mentioned.

      Finally, molecular bonding techniques in which the  
bonding energy is controlled so that a mechanical force  
can result in separation of a layer which has been  
temporarily bonded to a support can also be mentioned.

25       When a useful layer is connected to a first support  
using one of the above techniques, transfer of the layer  
involves bringing a second support into contact with the  
free face of the useful layer using suitable bonding  
forces, which free face of the assembly comprising the  
30   layer and the first support is known as the "front" face.

      Transfer is completed by applying stresses  
(typically tension and/or bending and/or shear) between  
the layer to be transferred and the first support,  
employing one or more tools such as a drawing rig or a  
35   blade introduced laterally at the weakened interface to  
propagate a crack, or by applying a jet of fluid to said

weakened interface (see, for example, French patent FR-A-2 796 491).

When the useful layer to be transferred has not undergone any component fabrication steps, then said transfer is generally carried out regardless of the bonding technique employed to affix the useful layer to the second support (in particular by molecular bonding, eutectic bonding, bonding using a polymer or resin, etc).

In contrast, the problem is different when the useful layer has already undergone steps in the component fabrication process, in which case it is often necessary to carry out different types of deposition (semiconductor oxides or nitrides, polycrystalline semiconductor, amorphous semiconductor, monocrystalline semiconductor formed by homo- or hetero-epitaxy).

When, for example, a "full wafer" method is carried out in a specific reactor, said deposits have a tendency to partially or completely cover the free face of the useful layer and to overflow onto the side faces of the substrate composed of said useful layer temporarily fixed to its first support.

Overflowed covering produces a useful layer that is encapsulated after a fashion, the main result being strengthening of the periphery of the bond between the useful layer and the first support, which can then render problematic the subsequent detachment required to transfer said useful layer to its second support.

The present invention aims to overcome this drawback.

To this end, in a first aspect, the invention provides a method for transferring a useful layer of a monocrystalline material from a first support to a second support, for use in fabricating substrates or components on substrates for microelectronics, optoelectronics or optics, comprising the following steps:

- forming a first substrate comprising the first support and at least a portion of the useful

- layer with a detachable interface between the first support and the useful layer, the outer edge of the useful layer being inwardly spaced from the outer edge of the first support;
- 5       • forming a deposited layer of material on the useful layer, said deposited layer being liable to laterally cover said detachable interface at least partially;
  - 10       • locally removing support material and/or deposited material so as to have said detachable interface exposed;
  - securing an exposed face of the useful layer to a second support; and
  - 15       • causing detachment at said detachable interface between the first support and the useful layer, said detachment being promoted by said exposed regions of the detachable interface.

The following are preferred but non limiting features of the method:

- 20       - the material removing step comprises removing a peripheral zone of deposited material which covers the interface laterally.
- the material removing step is implemented by cutting.
- 25       - the material removing step is implemented by etching.
- etching is carried out by masking the useful layer inside the peripheral zone.
- the material removing step also comprises removing
- 30       at least a portion of the material of the first support beneath the peripheral zone of deposited material.
- the material removing step comprises removing a peripheral zone of material from the first support in the region in which the peripheral zone of deposited material
- 35       is formed, prior to said deposition.

- the peripheral zone of the material from the first support is a peripheral recess that opens laterally and frontally at the side of the useful layer.

5     - the depth of the recess is greater than or equal to the thickness of the peripheral zone of deposited material.

10     - the width of the recess is such that it substantially covers the distance between the outer edge of the first support and the outer edge of the useful layer.

- the step of removing a peripheral zone from the first support is implemented after forming the useful layer on said first support.

15     - the detachment step is implemented by applying lateral stresses at the detachable interface using a detachment means.

20     - the material removal step comprises forming separating channels between the exposed face of the useful layer and the region of the detachable interface, prior to the step of securing the exposed face of the useful layer to the second support.

- the channels define individual islands.

25     - the channels are formed using a technique selected from the group formed by saw cutting, laser cutting, ion beam cutting and masked chemical etching.

- the detachment step is performed using a detachment means that can apply, between the first and second supports, one or more stresses selected from the group formed by tension, bending and shear stresses.

30     - the deposited material layer is formed by "full wafer" epitaxy.

- the useful layer comprises a layer forming a seed for epitaxial growth and one or more epitaxially grown layers.

35     - the material of the seed layer is selected from the group formed by silicon carbide, sapphire, gallium nitride, silicon and aluminum nitride.

- the epitaxially grown layer is formed from one or more metal nitrides.

- the material of the first support is selected from the group formed by semiconductors, semiconductor carbides and insulators such as sapphire.

- the detachable interface is formed using a technique selected from the group formed by implanting gas species, forming a porous layer that can be attacked chemically, and bonding by molecular bonding with control of the bonding forces.

In a second aspect of the invention, the invention provides a support for fabricating substrates or components on substrates for microelectronics, optoelectronics or optics, which can receive at least a portion of a useful layer, having a detachable interface between the support and the useful layer, and in which a material layer deposition on the useful layer can form a peripheral zone of deposited material that laterally covers said interface at least partially, the support comprising a peripheral recessed zone adapted for receiving said peripheral zone of deposited material, enabling said interface to be exposed laterally for detachment purposes.

Further aspects, aims, and advantages of the present invention will become apparent from the following description of preferred implementations thereof, given by way of non-limiting example and made with reference to the accompanying drawings, in which:

Figure 1 is a cross sectional view of a first substrate comprising a first support and a useful layer;

Figure 2 is a cross sectional view of a second support affixed to a first substrate in order to transfer the useful layer thereto;

Figure 3 is a cross sectional view illustrating detachment of a working zone from a detachment tool;

Figure 4 is a cross sectional view of the first substrate illustrating a particular arrangement of a first support of a detachment tool;

Figures 5 and 6 are cross sectional and plan views of a particular arrangement of the useful layer for gaining access to the interface between it and the first support.

Referring firstly to Figures 1 and 2, a first support 10 is formed from a semiconductor material, for example silicon carbide SiC, mono- or polycrystalline silicon, etc, or formed from an insulating material, for example sapphire.

A layer 12 is formed or deposited on said first support and forms a releasable bonding interface; typically, it can be a layer of semiconducting oxide such as SiO<sub>2</sub>, semiconducting nitride, etc.

The layer 12 forms a releasable bonding interface between the first support 10 and a useful layer formed in this case by a base layer 14 on which a layer 16 has been formed or deposited. Typically, the base layer 14 is a seed layer on which the layer 16 is formed by epitaxy. This seed layer is formed of silicon carbide, sapphire, gallium nitride, silicon, or aluminum nitride, for example.

In one embodiment, the base layer 14 is formed of SiC while the epitaxially grown layer is formed of a metal nitride such as gallium nitride GaN, or formed by a stack of different metal nitrides.

Such a useful layer structure is of advantage in particular in fabricating light-emitting diodes (LEDs).

As seen in Figure 1, in conventional manner, the first support is slightly larger than the assembly of layers 12, 14 and 16 formed on said support. Deposition of the layer 16 by epitaxy, which is traditionally carried out in a "full wafer" reactor, thus extends not only above the seed layer 14, but also around a ring 161 which covers the recessed periphery of the support 10.

Figure 2 illustrates affixing the assembly shown in Figure 1, termed the first substrate, to a second support 20. In this case, fixing is carried out using a metal bonding technique; the bonding layer is illustrated at

5

22. The useful layer 14, 16 is transferred from the first support 10 to the second support 20 after fixing as described above, in particular using a detachment tool that can apply a stress to the interface layer 12 between

10

the useful layer 14, 16 and the first support 10, to propagate separation in the plane of said interface. However, Figure 2 shows that the deposited GaN ring 161 causes two problems as regards such an operation: firstly, it reinforces the bond between the useful layer

15

14, 16 and the first support at the periphery of the first substrate, and secondly, it renders impossible direct access to the bonding interface 12 by a detachment tool (thin blade, jet of fluid, etc) in order to apply thereto the required detachment stress (arrow F1 in

20

Figure 3a).

Several solutions for solving these problems are described below.

A first solution is shown diagrammatically in Figure 3a. It consists of removing the ring 161.

25

In a first embodiment, said removal can be carried out by etching. To this end, a mask is produced on the free face of the useful layer 14, 16, which mask will only release the ring 161. An attack medium that is suitable for the material of the ring is then used to

30

attack and remove the ring over its entire thickness, in order to detach the separable interface layer 12. In the present example, as the ring is GaN, the following is preferably carried out: plasma etching or RIE (reactive ion etching) based on  $\text{SiCl}_4$ ,  $\text{BCl}_3$  (reference should be

35

made to the article "GaN: Processing, Defects and Devices", S J Pearton et al, Journal of Applied Physics, vol 86, no 1, 1<sup>st</sup> July 1999).



In a variation, other etching techniques such as plasma etching can be used.

In a second embodiment, the ring is removed using a cutting or trimming technique. It is possible to use a mechanical saw cutting technique, a laser cutting technique, or an ion beam cutting technique. As will be understood, the ring is removed by producing a cylindrical cut of revolution and a cut in a transitional plane between the ring 161 and the first support 10.

In all cases, care is taken that etching or cutting provides satisfactory access to the detachable interface layer 12 to allow transfer of the useful layer. It should be noted in this respect that merely partial removal of the ring 161 may be sufficient to attenuate the peripheral bond between the first support 10 and the useful layer 14, 16 and to allow the detachment tool to act correctly. In contrast, it is possible to remove the ring 161 while also penetrating into the support itself.

In a variation, as illustrated in Figure 3b, cutting is carried out through the entire thickness of the first substrate to remove not only the interfering ring 161 but also the portion 101 of the first support which is subjacent thereto. This variation may be more suitable when the working depth of the cutting technique is difficult to control.

Preferably, the ring 161 is removed before the second support 20 has been affixed to the useful layer 14, 16. However, if the technique used to remove the ring 161 allows it, removal can be carried out after fixing.

A further approach for overcoming the problem caused by the peripheral deposit 161 is illustrated in Figure 4. It consists of using a first support 10 specifically prepared to include a peripheral recess 102.

Advantageously, said peripheral recess extends in a radial direction (horizontally in Figure 4) between the outer edge of the support 10 and the outer edge of the

interface layer 12 and useful layer 14, 16. In the axial direction (vertically in Figure 4), said recess 102 preferably extends over a depth (d) that is at least equal to the thickness of the deposit 16 formed, so that  
5 at the end of the deposition operation, the peripheral ring 161 that it forms does not obstruct the releasable interface. Thus, the ring 161 does not have to be removed.

The recess is preferably produced before forming the  
10 layers 12 and 14, and in any case before forming all or a portion of the useful layer which may cover the periphery of the first substrate.

Preferably, said recess is produced by ablation with a laser beam or by mechanical trimming.

15 A further approach is shown in Figures 5 and 6. It consists of forming cuts or channels 18 in the thickness of the useful layer 14, 16, down to the interface layer 12.

These cuts define individual islets or tiles 19, for  
20 example square in shape, as shown in Figure 6, with a size that is preferably in the range from  $1 \times 1$  square micrometer ( $\mu\text{m}^2$ ) to  $300 \times 300 \mu\text{m}^2$ .

These cuts can be formed either mechanically, using a saw cutting technique, or laser cutting or using ion  
25 beam cutting, or chemically by etching, first placing an etching mask that allows selective geometric attack on the free surface of the useful layer 14, 16. Preferably, and in particular to prevent said attack from excavating the walls of the channels too much during formation, a  
30 dry or wet etching technique is used.

When the useful layer is formed from a seed layer of SiC 14 on which GaN epitaxy is carried out, argon based ion etching is carried out (see the article "GaN: Processing, Defects and Devices", cited above).

35 With such an approach, reinforcement of the interface between the useful layer and the first support caused by the presence of the ring 161 is avoided since,

when a releasing stress is exerted between the supports 10 and 20 after producing the assembly of the type illustrated in Figure 2, each individualized tile, which is not itself subjected to the reinforcement due to the ring 161, can be separated from the support under the effect of said stress.

It should be noted that said stress can be a tension, bending or shear stress, or a variety of combinations of said stresses.

Clearly, the present invention can be applied to a very wide variety of semiconductor materials. In addition to the example of a layer of nitride developed on silicon carbide on insulator (SiCOI) as described above, the invention can be employed, for example when transferring a useful layer based on silicon in which certain methods for fabricating components using CMOS technology on a second insulating support 10 have been carried out. Many other applications are also possible.

In this respect, the skilled person will readily select solutions that are suitable (choice of one of the three approaches described, choice of type of material removal, etc) as a function of the materials used.

Finally, it can be observed that the three approaches of the invention described above can be combined together.

CLAIMS

1. A method for transferring a useful layer of a monocrystalline material from a first support to a second support, for use in fabricating substrates or components on substrates for microelectronics, optoelectronics or optics, comprising the following steps:
- forming a first substrate comprising the first support and at least a portion of the useful layer with a detachable interface between the first support and the useful layer, the outer edge of the useful layer being inwardly spaced from the outer edge of the first support;
  - forming a deposited layer of material on the useful layer, said deposited layer being liable to laterally cover said detachable interface at least partially;
  - locally removing support material and/or deposited material so as to have said detachable interface exposed;
  - securing an exposed face of the useful layer to a second support; and
  - causing detachment at said detachable interface between the first support and the useful layer, said detachment being promoted by said exposed regions of the detachable interface.
2. A method according to claim 1, wherein the material removing step comprises removing a peripheral zone of deposited material which covers the interface laterally.
3. A method according to claim 2, wherein the material removing step is implemented by cutting.
4. A method according to claim 2, wherein the material removing step is implemented by etching.

5. A method according to claim 3, wherein etching is carried out by masking the useful layer inside the peripheral zone.

5 6. A method according to any one of claims 2 to 5, wherein the material removing step also comprises removing at least a portion of the material of the first support beneath the peripheral zone of deposited material.

10

7. A method according to claim 1, wherein the material removing step comprises removing a peripheral zone of material from the first support in the region in which the peripheral zone of deposited material is formed, prior to said deposition.

15

8. A method according to claim 7, wherein the peripheral zone of the material from the first support is a peripheral recess that opens laterally and frontally at the side of the useful layer.

20

9. A method according to claim 8, wherein the depth (d) of the recess is greater than or equal to the thickness of the peripheral zone of deposited material.

25

10. A method according to claim 8 or claim 9, wherein the width of the recess is such that it substantially covers the distance between the outer edge of the first support and the outer edge of the useful layer.

30

11. A method according to any one of claims 7 to 10, wherein the step of removing a peripheral zone from the first support is implemented after forming the useful layer on said first support.

35

12. A method according to any one of claims 2 to 11, wherein the detachment step is implemented by applying

lateral stresses at the detachable interface using a detachment means.

13. A method according to claim 12, wherein the material  
5 removal step comprises forming separating channels  
between the exposed face of the useful layer and the  
region of the detachable interface, prior to the step of  
securing the exposed face of the useful layer to the  
second support.
14. A method according to claim 13, wherein the channels  
10 define individual islands.
15. A method according to claim 13 or claim 14, wherein  
15 the channels are formed using a technique selected from  
the group formed by saw cutting, laser cutting, ion beam  
cutting and masked chemical etching.
16. A method according to any one of claims 13 to 15,  
20 wherein the detachment step is performed using a  
detachment means that can apply, between the first and  
second supports, one or more stresses selected from the  
group formed by tension, bending and shear stresses.
17. A method according to any one of claims 1 to 16,  
25 wherein the deposited material layer is formed by "full  
wafer" epitaxy.
18. A method according to claim 17, wherein the useful  
30 layer comprises a layer forming a seed for epitaxial  
growth and one or more epitaxially grown layers.
19. A method according to claim 18, wherein the material  
35 of the seed layer is selected from the group formed by  
silicon carbide, sapphire, gallium nitride, silicon and  
aluminum nitride.

20. A method according to claim 19, wherein the epitaxially grown layer is formed from one or more metal nitrides.

5 21. A method according to any one of claims 1 to 20, wherein the material of the first support is selected from the group formed by semiconductors, semiconductor carbides and insulators such as sapphire.

10 22. A method according to any one of claims 1 to 21, wherein the detachable interface is formed using a technique selected from the group formed by implanting gas species, forming a porous layer that can be attacked chemically, and bonding by molecular bonding with control  
15 of the bonding forces.

23. A support for fabricating substrates or components on substrates for microelectronics, optoelectronics or optics, which can receive at least a portion of a useful  
20 layer, having a detachable interface between the support and the useful layer, and in which a material layer deposition on the useful layer can form a peripheral zone of deposited material that laterally covers said interface at least partially, the support comprising a  
25 peripheral recessed zone adapted for receiving said peripheral zone of deposited material, enabling said interface to be exposed laterally for detachment purposes.

30

1 / 2

FIG.1

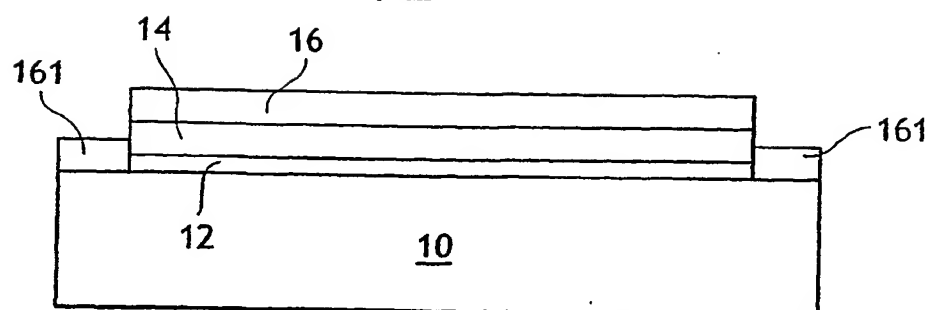


FIG.2

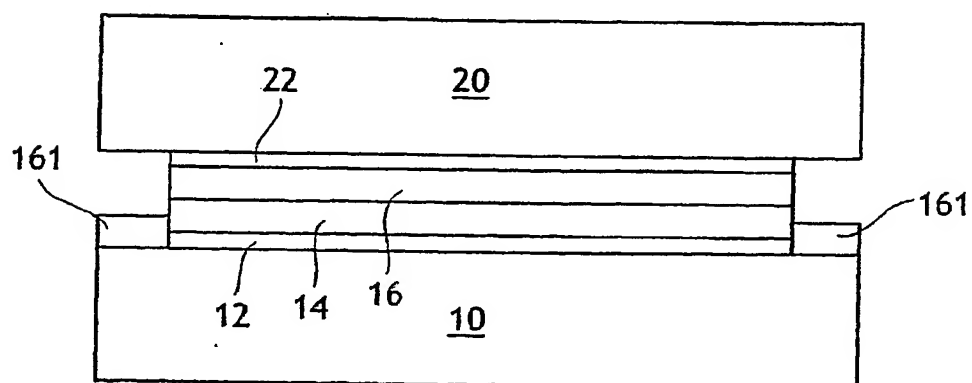


FIG.3a





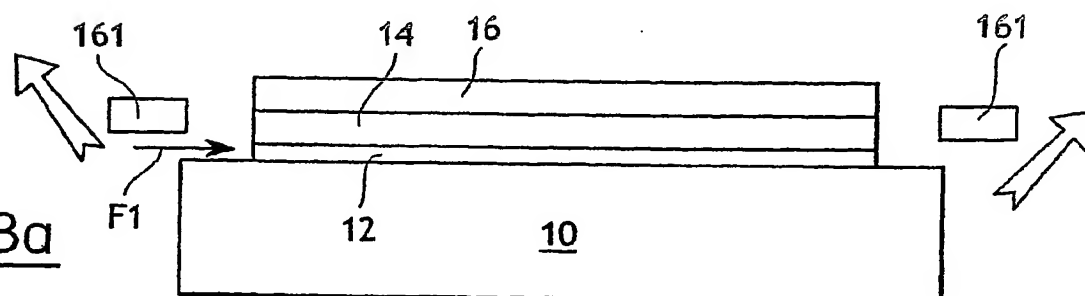


FIG.3b

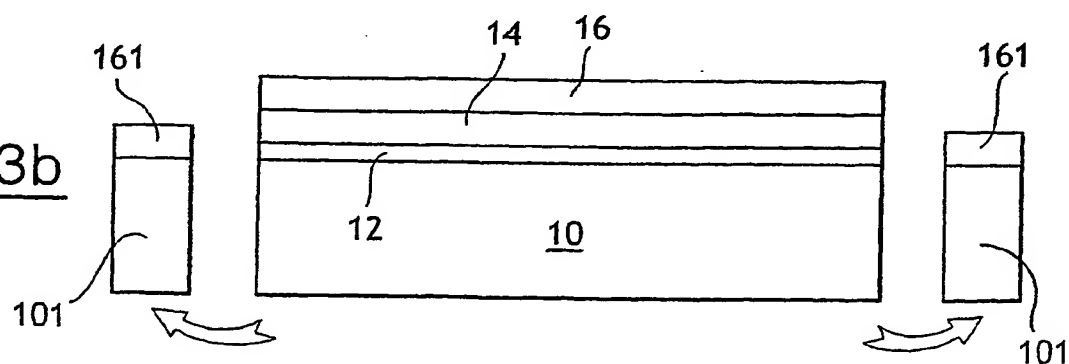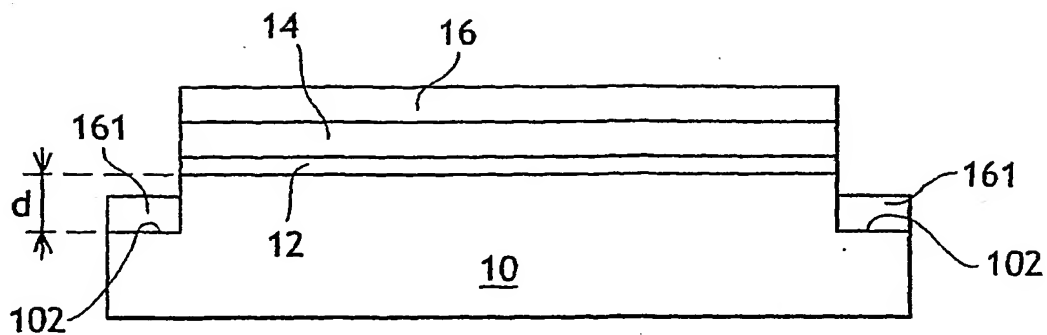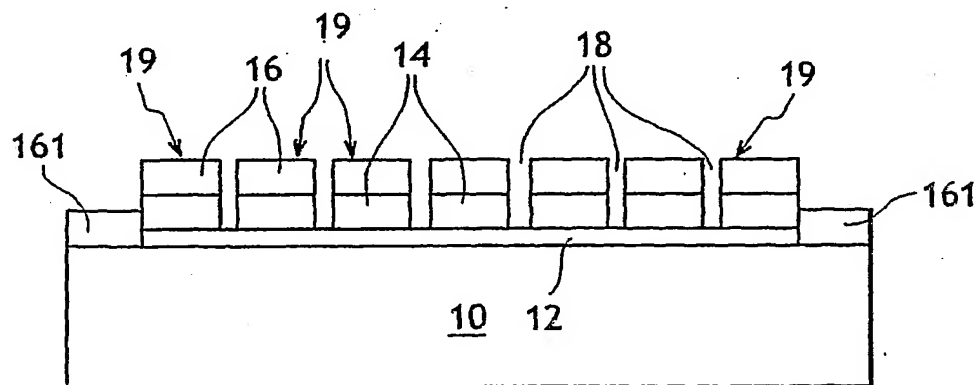

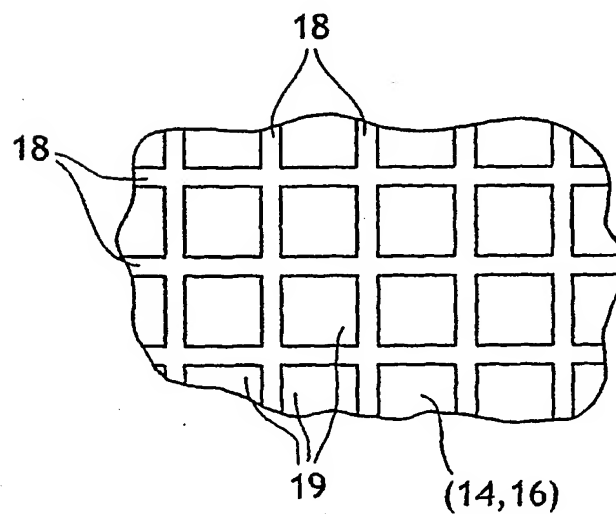

2 / 2

FIG.4FIG.5FIG.6



(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number  
**WO 2004/081974 A3**

(51) International Patent Classification<sup>7</sup>: **H01L 21/762**

(21) International Application Number:  
PCT/IB2004/001344

(22) International Filing Date: 12 March 2004 (12.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0303163 14 March 2003 (14.03.2003) FR

(71) Applicant (for all designated States except US):  
**S.O.I.TEC SILICON ON INSULATOR TECH-  
NOLOGIES** [FR/FR]; Parc Technologique des Fontaines,  
Chemin des Franques, F-38190 Bernin (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LETERTRE, Fab-  
rice** [FR/FR]; 33, quai Jongkind, F-38000 Grenoble (FR).  
**RAYSSAC, Olivier** [FR/FR]; 7, chemin Chapitre, F-38100  
Grenoble (FR).

(74) Agents: **MARTIN, Jean-Jacques et al.**; Cabinet Regim-  
beau, 20, rue de Chazelles, F-75847 Paris Cedex 17 (FR).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

(88) Date of publication of the international search report:  
25 November 2004

[Continued on next page]

(54) Title: A METHOD OF PRODUCING SUBSTRATES OR COMPONENTS ON SUBSTRATES INVOLVING TRANSFER  
OF A USEFUL LAYER, FOR MICROELECTRONICS, OPTOELECTRONICS, OR OPTICS

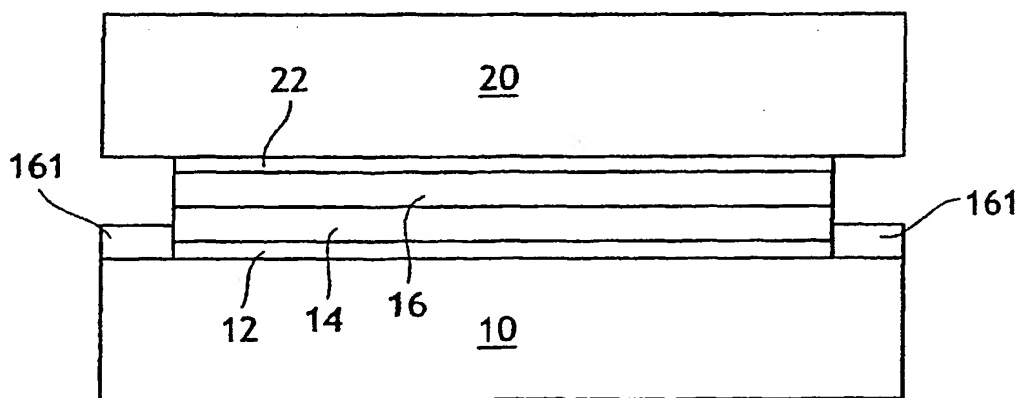

(57) Abstract: The invention provides a method of transferring a useful layer of a monocrystalline material from a first support to a second support, comprising the following steps: forming a first substrate comprising the first support (10) and the useful layer (14, 16) with a detachable interface (12) between them, in which a treatment involving the useful layer includes the formation of a peripheral zone of material (161) that may laterally cover said interface; removing material, allowing detachment to reach said interface (12) in order to detach it at said interface; affixing a free face of the useful layer (14, 16) to a second support (20); and detaching at said interface (12). The detachment means can be employed in the absence of a peripheral zone of material. Application to fabricating substrates or components on substrates for microelectronics, optoelectronics, or optics.

WO 2004/081974 A3



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

International Application No.  
PCT/IB2004/001344A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H01L21/762

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 059 663 A (CANON KK) 13 December 2000 (2000-12-13)	1,2,23
Y	the whole document	3-22
Y	WO 02/084721 A (COMMISSARIAT ENERGIE ATOMIQUE ; ASPAR BERNARD (FR); MORICEAU HUBERT (F) 24 October 2002 (2002-10-24) page 34, column 1 - page 34, column 25; figures 39,40	3-22
A	US 6 159 323 A (BRUEL MICHEL ET AL) 12 December 2000 (2000-12-12) abstract	

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

7 September 2004

Date of mailing of the international search report

16/09/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Hedouin, M

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB2004/001344

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1059663	A	13-12-2000	JP 3472197 B2	02-12-2003
			JP 2000349319 A	15-12-2000
			JP 3542521 B2	14-07-2004
			JP 2000349066 A	15-12-2000
			CN 1280383 A	17-01-2001
			EP 1059663 A2	13-12-2000
			US 6664169 B1	16-12-2003
			US 2004055894 A1	25-03-2004
WO 02084721	A	24-10-2002	FR 2823596 A1	18-10-2002
			EP 1378003 A2	07-01-2004
			WO 02084721 A2	24-10-2002
			TW 577102 B	21-02-2004
US 6159323	A	12-12-2000	FR 2771852 A1	04-06-1999
			EP 0923123 A2	16-06-1999
			JP 11317577 A	16-11-1999

Form PCT/ISA/210 (patent family annex) (January 2004)